MIZUMI SHOPEE STORE

Product Sales Performance Analysis

Data Analysis Portfolio Project

Platform: Shopee Thailand | Store: MizuMi & Bomi Official Shop

Data Collection: Web Scraper io (Chrome Extension)

Tools: Excel & Power Query · Python · SQL · Power BI · Claude.ai

Prepared by: Wiwat Wetmongkongorn

Date: March 2026

1. Project Overview & Objectives

1.1 Background

Mizuhada Group is a Thai beauty and wellness company operating two product brands through their official Shopee Thailand store "MizuMi & Bomi Official Shop". MizuMi is the group's core skincare and UV protection brand, specialising in sunscreen serums, acne care, and cleansing products. Bomi is the group's supplement brand, offering health and beauty supplements designed to complement the skincare range. Together, the two brands serve customers seeking both topical skincare and ingestible beauty solutions.

With over 1.5 million followers and a store rating of 4.9/5.0, MizuMi & Bomi Official Shop is one of the most prominent beauty brand stores on the Shopee Thailand platform. This project analyses publicly available product data scraped from their official store to uncover sales performance patterns, pricing strategy insights, and category-level opportunities across both brands. The analysis follows a full data analytics workflow — from data collection and cleaning through to SQL querying, dashboard development, and strategic recommendations.

1.2 Project Objectives

This project is guided by five key analytical objectives:

1. Identify top-performing products by revenue and units sold — to determine which products drive the most value for the store.
2. Analyse category-level sales distribution — to identify which product categories should be prioritised for growth.
3. Examine the relationship between price and sales volume — to assess whether lower price points consistently drive higher sales.
4. Evaluate the impact of discounting on sales performance — to determine whether higher discounts lead to significantly more units sold.
5. Assess product rating patterns across categories — to understand whether ratings influence sales volume and which categories maintain the highest product quality.

1.3 Tools & Technologies

The following tools were used across each stage of the project:

- Web Scraper io (Chrome Extension) — Data collection: used to extract product listings directly from Shopee Thailand by scraping each product category page separately
- Microsoft Excel — Data organisation: manually structured and categorised scraped data into 12 product category sheets, with missing products added manually before loading into Power BI
- Microsoft Excel & Power Query — Data cleaning & transformation: all cleaning and transformation steps were performed in Excel Power Query Editor before the finalised dataset was loaded into Power BI

- Claude.ai (Anthropic) — AI assistance: used to generate a Python script for automated product name cleaning and standardisation
- SQLite — SQL analysis: loading the cleaned dataset and running analytical queries
- Power BI Desktop — Dashboard & reporting: interactive dashboard, DAX measures, and data visualisations

1.4 Dataset Overview

The dataset was scraped from the MizuMi & Bomi Official Shop on Shopee Thailand on 20 March 2026. Of the 174 total store listings, 167 products were included in the final dataset — comprising both in-stock and out-of-stock listings that contain sales and rating data. The remaining 7 listings were excluded — 5 "Not for sale" promotional items, 1 limited collector's set (MizuMi x Chen Zheyuan), and 1 "New Product Coming Soon" placeholder.

167	2,763,224	฿1.21B	4.91 / 5.0
Total Products 12 categories	**Est. Units Sold** MizuMi: 133 | Bomi: 34	**Est. Total Revenue** Price × est. units sold	**Average Store Rating** Across all products

2. Data Collection & Web Scraping Process

2.1 Data Source

All data was collected from the MizuMi & Bomi Official Shop on Shopee Thailand (shopee.co.th/mizumi_officialshop) on 20 March 2026. The store had approximately 1.6 million followers and a rating of 4.9/5.0 as of the scrape date.

2.2 Scraping Approach

Four scraping methods were attempted before a successful approach was found:

1. Python requests library (Shopee API) — Blocked with HTTP 403 Forbidden error. Shopee's anti-bot system detected and rejected direct API calls from Python.
2. Playwright (browser automation) — Partially successful in opening the store but triggered Shopee's CAPTCHA verification system, blocking data retrieval.
3. Ultimate Web Scraper (Chrome Extension by Happy Panda Tech FZ-LLC) — Partially successful. Extracted an initial batch of listings but missed products due to incomplete page scrolling, resulting in an incomplete dataset of 140 products out of 175.
4. Web Scraper io (Chrome Extension) — Successfully extracted all product listings by scraping each product category page individually. This approach gave full control over which products were captured and allowed manual verification per category, resulting in 167 confirmed products.

Web Scraper io proved the most reliable approach as it allowed category-by-category scraping within an authenticated browser session. This iterative method also enabled manual quality control at each step — an important real-world lesson in adaptive data collection strategies.

2.3 Raw Data Structure

Web Scraper io exported the following 5 fields per product per category sheet:

Column (Raw)	Description	Data Type
Product	Full product name (Thai + English)	Text
Price	Current selling price	Number
Discount	Discount rate (negative decimal, e.g. -0.5)	Number
Quantity_sold	Units sold (Thai text, e.g. ขายได้ 8พัน+)	Text
Rating	Product star rating	Number

2.4 Data Limitations

- Units sold are approximate minimums (e.g. "8,000+" means at least 8,000) — actual sales figures may be higher, leading to conservative revenue estimates.
- Revenue figures are estimates calculated as Price × Est. Units Sold and do not account for returns, cancellations, vouchers, or multiple product variants.
- The dataset represents a single point-in-time snapshot (20 March 2026) and does not capture historical sales trends over time.
- 7 listings were excluded from the dataset — 5 "Not for sale" promotional items, 1 limited collector's set, and 1 "New Product Coming Soon" placeholder.
- Competitor data was not collected — the analysis focuses exclusively on MizuMi & Bomi's own store performance.

3. Data Cleaning & Transformation

Data cleaning was performed in two stages. First, products were manually organised into 12 category sheets in Microsoft Excel during the scraping process — each sheet representing one product category. Missing products identified during data validation were also manually added to their respective sheets at this stage. Second, all cleaning and transformation was completed in Power Query Editor in Microsoft Excel. Once all cleaning and transformation steps were complete, the finalised dataset was loaded into Power BI Desktop for dashboard development.

3.1 Issues Found in Raw Data

The raw data required the following cleaning steps before analysis:

Issue	Example	Resolution
Column order inconsistent across sheets	Some sheets had Price first, others had Product first	Power Query auto-detected headers per sheet on import
Units sold stored as Thai text	"ขายได้ 8พัน+ ชิ้น" instead of 8,000	Added Custom Column with M formula to parse Thai number words (พัน=1K, หมื่น=10K, แสน=100K)
Null values in est_units_sold column	Some products show no sales data (null)	Replaced null with 0 using null check at start of formula
Discount stored as negative decimal	-0.5 instead of 50%	Added Custom Column: Number.Abs([discount_raw]) × 100
Rating mixed with text in some rows	"4.9 เรตติ้งร้าน" instead of 4.9	Used Text.BeforeDelimiter to extract numeric value before the space
Discount and rating columns swapped in some sheets	Acne care sheet had columns in wrong order	Reordered columns manually in Excel before loading
No revenue column	Revenue not provided by Shopee	Added Custom Column: [price_thb] × [est_units_sold]

3.2 Power Query Transformation Steps

The following transformation steps were applied in Excel Power Query Editor in order:

1. Opened Excel Power Query Editor via Data → Get Data → Launch Power Query Editor
2. Loaded all 12 category sheets and appended them into a single combined table using Append Queries
3. Renamed columns to consistent meaningful field names across all sheets

4. Added est_units_sold column — parsed Thai text (พัน/หมื่น/แสน) to numeric integer, with null values replaced by 0
5. Added discount_pct column — converted negative decimal to positive percentage
6. Added original_price column — calculated as price ÷ (1 - discount_pct / 100) to derive the original pre-discount price
7. Added est_revenue_thb column — calculated as price_thb × est_units_sold
8. Added brand column — "Bomi" if product name contains "Bomi", else "MizuMi"
9. Added product_name_short column — Claude.ai (Anthropic) was used to generate a Python script that automatically extracted the English product name from mixed Thai-English listings, handling three cases: (1) English name with Thai description, (2) Thai bracket prefix with English name and Thai description, and (3) Thai-only names kept as-is. The output was manually reviewed and corrected for accuracy
10. Added category column to each sheet individually — before appending, a Custom Column with the hardcoded category name (e.g. = "Facial sunscreen") was added to each of the 12 sheets, then all sheets were appended into a single combined table
11. Changed column data types — price and original price to Decimal, est_units_sold to Integer, rating to Decimal
12. Clicked Close & Apply to save the cleaned dataset back into Excel, then loaded the finalised Excel file into Power BI Desktop for dashboard development

3.3 Key Power Query Formulas

Custom Column formulas used in Power Query:

```
// est_units_sold — parse Thai number text (handles nulls)
= if [Quantity_sold] = null then 0
  else if Text.Contains([Quantity_sold], "แสน") then
    Number.From(Text.BeforeDelimiter(
        Text.Replace([Quantity_sold], "ขายได้ ", ""), "แสน")) * 100000
  else if Text.Contains([Quantity_sold], "หมื่น") then
    Number.From(Text.BeforeDelimiter(
        Text.Replace([Quantity_sold], "ขายได้ ", ""), "หมื่น")) * 10000
  else if Text.Contains([Quantity_sold], "พัน") then
    Number.From(Text.BeforeDelimiter(
        Text.Replace([Quantity_sold], "ขายได้ ", ""), "พัน")) * 1000
  else try Number.From(
        Text.Replace(Text.Replace([Quantity_sold], "ขายได้ ", ""), " ชิ้น",
""))
       otherwise 0

// discount_pct — convert negative decimal to positive percentage
= Number.Abs([discount]) * 100

// original_price — derive pre-discount price
= if [discount] = null or [discount] = 0 then [price]
```

```
  else Number.Round([price] / (1 - Number.Abs([discount])), 2)

// est_revenue_thb — estimated revenue
= [price] * [est_units_sold]

// brand — derived from product name
= if Text.Contains([Product], "Bomi") then "Bomi" else "MizuMi"
```

3.4 AI-Assisted Product Name Cleaning

Product names scraped from Shopee contain both English and Thai text mixed together, which creates cluttered labels in Power BI visuals. Claude.ai (Anthropic) was used to generate a Python script to automatically extract clean, shortened product names. The script handled three cases:

1. English name followed by Thai description → extract English part only (e.g. "MizuMi UV Bright Body Serum 180ml เซรั่มกันแดด..." → "MizuMi UV Bright Body Serum 180ml")
2. Thai bracket prefix followed by English name and Thai description → keep bracket and English, remove Thai (e.g. "[แพ็คคู่] MizuMi UV Water Serum เซรั่ม..." → "[แพ็คคู่] MizuMi UV Water Serum")
3. Thai-only product name → keep entire name as-is (e.g. "MizuMi เซตดูโอ้กู้ผิวแห้ง..." → kept unchanged)

The script was reviewed and manually corrected for edge cases before the product_name_short column was added to the final dataset.

3.5 Output Dataset Fields

After cleaning, the finalized dataset contains 167 products across 12 categories with the following fields:

Field	Type	Description
brand	Text	Brand — MizuMi (133 products) or Bomi (34 products)
category	Text	Product category — 12 categories derived from sheet name
product_name	Text	Full product name (Thai + English)
product_name_short	Text	Shortened product name for use in Power BI visuals
price_thb	Decimal	Current selling price in Thai Baht
original_price	Decimal	Price before discount applied

discount_pct	Integer	Discount percentage (0–64%)
est_units_sold	Integer	Estimated units sold — minimum value from Shopee display
est_revenue_thb	Decimal	Estimated revenue (price_thb × est_units_sold)
rating	Decimal	Product star rating out of 5.0

4. SQL Analysis & Queries

SQL analysis was performed using SQLite — a lightweight, file-based relational database. The finalized dataset was split into two tables to demonstrate relational database design and the use of JOIN queries, which are fundamental to real-world data analysis workflows.

4.1 Database Structure

The dataset was split into two relational tables connected by a product_id foreign key:

Table	Columns	Rows	Description
products	product_id, product_name, brand, category, price_thb, original_price	167	Product information
sales	product_id, discount_pct, est_units_sold, est_revenue_thb, rating	167	Sales performance data

4.2 SQL Queries & Results

The following 9 queries were written to answer the project objectives, progressing from basic to advanced:

Query 1 — All products sorted by units sold

Objective: Identify top-performing products by sales volume.

```
SELECT products.product_name, products.category, products.price_thb,
       sales.est_units_sold
FROM products
JOIN sales ON products.product_id = sales.product_id
ORDER BY sales.est_units_sold DESC;
```

Top 5 results:

	product_name	category	price_thb	est_units_sold
1	[แท็คคู่] MizuMi UV Water Serum SPF50+ …	Facial sunscreen	781.0	200000
2	[แท็คคู่] MizuMi UV Bright Body Serum …	Body sunscreen	390.0	200000
3	[เลือกแท็คด้านใน] MizuMi Smooth Cleansing …	Cleanser	490.0	100000
4	MizuMi Advance Niacinamide 15 …	Facial Care	489.0	100000
5	Bomi AstaReal Asta Concentrate 6 (3…	Skin supplement	389.0	90000

Query 2 — Top 10 products by revenue

Objective: Identify which products generate the most revenue for the store.

```
SELECT products.product_name, products.brand, sales.est_revenue_thb
FROM products
JOIN sales ON products.product_id = sales.product_id
ORDER BY sales.est_revenue_thb DESC
LIMIT 10;
```

Results:

	product_name	brand	est_revenue_thb
1	[แท็คคู่] MizuMi UV Water Serum SPF50+ …	MizuMi	156200000.0
2	[แท็คคู่] MizuMi UV Bright Body Serum …	MizuMi	78000000.0
3	[เลือกแท็คด้านใน] MizuMi Smooth Cleansing …	MizuMi	49000000.0
4	MizuMi Advance Niacinamide 15 …	MizuMi	48900000.0
5	MizuMi UV Water Serum SPF50+ PA++++…	MizuMi	39120000.0
6	Bomi AstaReal Asta Concentrate 6 (3…	Bomi	35010000.0
7	MizuMi Cica Soothing Moisture Gel …	MizuMi	34110000.0
8	[แท็คคู่สูตรใหม่เนื้อลิทแกรด]MizuMi UV Jelly Aqua …	MizuMi	31240000.0
9	MizuMi 3-In-1 Melt Away Cleansing …	MizuMi	31150000.0
10	[แท็คคู่] MizuMi B3 AHA Intense White …	MizuMi	23920000.0

Query 3 — All Bomi products with discount and rating

Objective: Review Bomi brand product performance metrics.

```
SELECT products.product_name, products.category,
       sales.discount_pct, sales.rating
FROM products
JOIN sales ON products.product_id = sales.product_id
WHERE products.brand = 'Bomi';
```

Returns all 34 Bomi products with their category, discount percentage and rating. Sample results:

	product_name	category	discount_pct	rating
1	[เซตเห็นผล 4 กล่อง] Bomi Appotin Hare Gro …	Health supplement	58.0	5.0
2	[แท็ค5] Bomi16.8 Balance Probiotics(1…	Probiotics	54.0	4.9
3	[แท็ค 5]Bomi B&B Shot Bio S(14x3g)โบมิ …	Probiotics	54.0	4.9
4	[แท็ค 5] Bomi AstaReal Asta …	Skin supplement	54.0	4.9
5	[เซต 4 กระปุก] Bomi X Series โบมิ เอ็กซ์ ซีรีส์ …	Skin supplement	53.0	4.9

Query 4 — Total revenue and units sold per category

Objective: Analyse category-level sales distribution to identify which categories should be prioritised.

```
SELECT products.category,
       SUM(sales.est_revenue_thb) AS 'Total Revenue (฿)',
       SUM(sales.est_units_sold)  AS 'Total Units Sold'
FROM products
JOIN sales ON products.product_id = sales.product_id
GROUP BY products.category
ORDER BY SUM(sales.est_revenue_thb) DESC;
```

Results:

	category	Total Revenue (฿)	Total Units Sold
1	Facial sunscreen	352364400.0	540783
2	Cleanser	199549920.0	534767
3	Facial Care	184538000.0	400000
4	Body sunscreen	156360000.0	468000
5	Skin supplement	86359135.0	162013
6	Body serum	82758000.0	220000
7	Probiotics	48651402.0	75318
8	Makeup	30202000.0	142000
9	Health supplement	29375386.0	56968
10	Acne care	18110000.0	105000
11	Toner Pad	14181003.0	30819
12	Facial mask	10045124.0	27556

Query 5 — Average rating per brand

Objective: Assess whether product quality differs between MizuMi and Bomi brands.

```
SELECT products.brand,
       ROUND(AVG(sales.rating), 2) AS 'Average Rating'
FROM products
JOIN sales ON products.product_id = sales.product_id
GROUP BY products.brand;
```

Results:

	brand	Average Rating
1	Bomi	4.91
2	MizuMi	4.88

Query 6 — Average discount per category

Objective: Evaluate discount strategy across categories.

```
SELECT products.category,
       ROUND(AVG(sales.discount_pct), 2) AS 'Average Discount (%)'
FROM products
JOIN sales ON products.product_id = sales.product_id
GROUP BY products.category
ORDER BY AVG(sales.discount_pct) DESC;
```

Results:

	category	Average Discount (%)
1	Body serum	55.44
2	Health supplement	54.93
3	Probiotics	53.2
4	Facial sunscreen	49.94
5	Facial mask	49.64
6	Body sunscreen	46.25
7	Skin supplement	45.44
8	Facial Care	44.23
9	Cleanser	43.29
10	Toner Pad	42.21
11	Makeup	39.43
12	Acne care	15.91

Query 7 — Discount label classification (CASE WHEN)

Objective: Classify products by discount level to evaluate pricing strategy.

```
SELECT products.product_name, products.price_thb, sales.discount_pct,
       CASE
           WHEN sales.discount_pct >= 50 THEN 'High'
           WHEN sales.discount_pct >= 30 THEN 'Mid'
           ELSE 'Low'
       END AS 'Discount Label'
FROM products
JOIN sales ON products.product_id = sales.product_id;
```

Sample results:

118	[เลือกลูกค้าใน] MizuMi PDRN Platinum Blac…	249.0	50.0	High
119	MizuMi Soothing Skin Fit Invisible …	249.0	27.0	Low
120	MizuMi Acne Skin Fit Invisible Tone…	249.0	27.0	Low

Query 8 — Categories with revenue above ฿50,000,000 (HAVING)

Objective: Identify the highest-revenue categories that should be the primary business focus.

```
SELECT products.category,
       SUM(sales.est_revenue_thb) AS 'Total Revenue (฿)'
FROM products
JOIN sales ON products.product_id = sales.product_id
GROUP BY products.category
HAVING SUM(sales.est_revenue_thb) > 50000000
ORDER BY SUM(sales.est_revenue_thb) DESC;
```

	category	Total Revenue (฿)
1	Facial sunscreen	352364400.0
2	Cleanser	199549920.0
3	Facial Care	184538000.0
4	Body sunscreen	156360000.0
5	Skin supplement	86359135.0
6	Body serum	82758000.0

6 out of 12 categories exceed the ฿50M revenue threshold.

Query 9 — Product performance labels (CASE WHEN + JOIN)

Objective: Classify all products by sales performance to identify top, mid, and low performers.

```
SELECT products.product_name, products.brand, sales.est_revenue_thb,
       CASE
           WHEN sales.est_revenue_thb >= 10000000 THEN 'Top Seller'
           WHEN sales.est_revenue_thb >= 1000000  THEN 'Mid Seller'
           ELSE 'Low Seller'
       END AS 'Performance Label'
FROM products
JOIN sales ON products.product_id = sales.product_id
ORDER BY sales.est_revenue_thb DESC;
```

Sample top results:

	product_name	brand	est_revenue_thb	Performance Label
1	[แท็คคู่] MizuMi UV Water Serum SPF50+ …	MizuMi	156200000.0	Top Seller
2	[แท็คคู่] MizuMi UV Bright Body Serum …	MizuMi	78000000.0	Top Seller
3	[เลือกแท็คด้านใน] MizuMi Smooth Cleansing …	MizuMi	49000000.0	Top Seller
4	MizuMi Advance Niacinamide 15 …	MizuMi	48900000.0	Top Seller
5	MizuMi UV Water Serum SPF50+ PA++++…	MizuMi	39120000.0	Top Seller

5. Power BI Dashboard

An interactive 4-page Power BI dashboard was built from the finalised dataset to visualise the findings across all five project objectives. The dashboard uses MizuMi's signature sky blue brand colour palette (#5BB8D4) and includes cross-page navigation buttons and a Brand slicer for interactive filtering.

5.1 Dashboard Structure

Page	Title	Objective Addressed
1	Store Overview	Objective 1 & 2 — Overall store performance and category distribution
2	Product Performance	Objective 1 & 3 — Top products and price vs sales relationship
3	Pricing & Discount	Objective 4 — Discount strategy and pricing analysis
4	Ratings & Product Quality	Objective 5 — Rating patterns and product quality assessment

5.2 DAX Measures

The following DAX measures were created to power the dashboard visuals and KPI cards:

Measure Name	Formula	Used in
Total Est. Revenue	SUM('All Products'[Est. Revenue (฿)])	All pages — KPI cards
Total Est. Units Sold	SUM('All Products'[Est. Units Sold])	Page 1, 2 — KPI cards
Total Listings	COUNTROWS('All Products')	Page 3, 4 — KPI cards
Avg Rating	AVERAGE('All Products'[Rating])	Page 4 — KPI card, bar chart
Avg Price	AVERAGE('All Products'[Price (฿)])	Page 2 — KPI card
Avg Discount	AVERAGE('All Products'[Discount %])	Page 3 — KPI card, scatter plot
Pct 5 Star Products	DIVIDE(COUNTROWS(FILTER(...Rating=5.0)), COUNTROWS(...))*100	Page 4 — KPI card
High Rated Products	COUNTROWS(FILTER('All Products', Rating >= 4.9))	Page 4 — KPI card


High Discount %	DIVIDE(COUNTROWS(FILTER(...Discount%>=50)), COUNTROWS(...))*100	Page 3 — KPI card
Price Range	"฿" & MIN(Price) & " — ฿" & FORMAT(MAX(Price),"#,##0")	Page 3 — KPI card

Calculated columns:

Column Name	Formula	Used in
Performance Label	IF(Revenue>=10M,"Top Seller", IF(Revenue>=1M,"Mid Seller","Low Seller"))	Page 2 — Product table
Discount Label	IF(Discount>=50,"High(≥50%)", IF(Discount>=30,"Mid(30-49%)","Low(<30%)"))	Page 3 — Donut chart

5.3 Page 1 — Store Overview


The Store Overview page provides a high-level snapshot of the entire store's performance. A Brand slicer in the top-right corner allows filtering all visuals by MizuMi or Bomi.

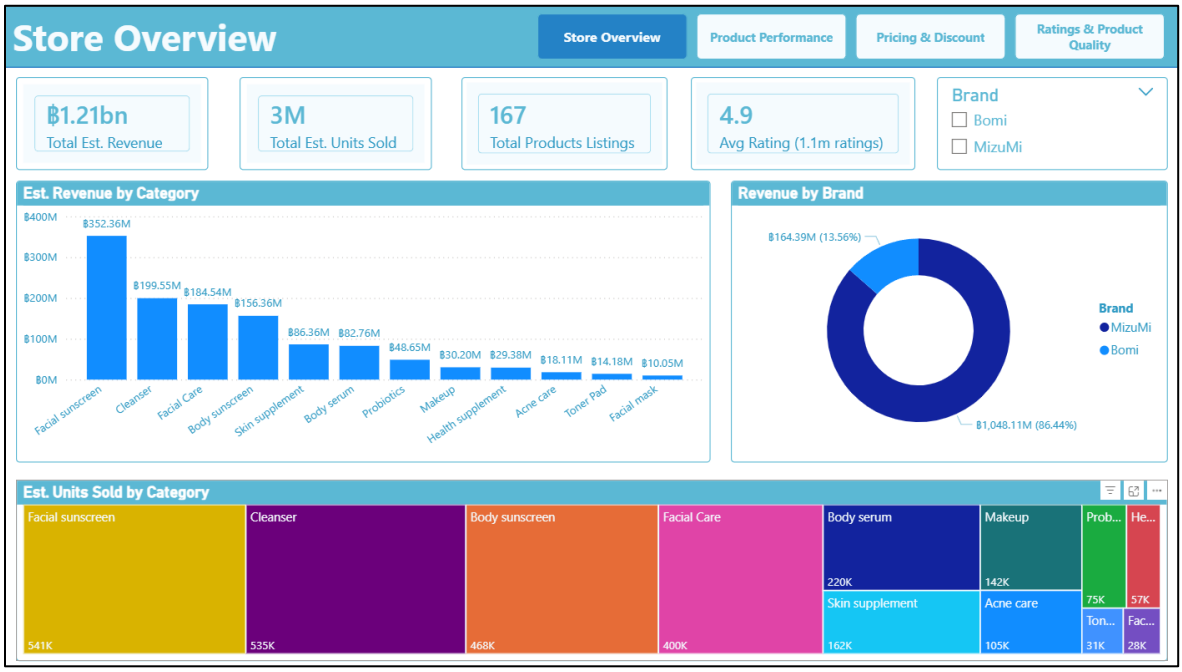

Visual	Type	What it shows
KPI Card 1	Card	฿1.21B — Total estimated revenue across all 167 listings
KPI Card 2	Card	3M — Total estimated units sold across all categories
KPI Card 3	Card	167 — Total product listings in the dataset
KPI Card 4	Card	4.9 — Average store rating across all products
Est. Revenue by Category	Bar Chart	Revenue ranked by category — Facial sunscreen leads at ฿352M
Revenue by Brand	Donut Chart	MizuMi 86.44% (฿1.05B) vs Bomi 13.56% (฿164M) revenue split
Est. Units Sold by Category	Treemap	Units sold proportionally by category — size reflects volume
Brand Slicer	Slicer	Interactive filter to view MizuMi or Bomi data separately

5.4 Page 2 — Product Performance


The Product Performance page identifies the top-performing individual products and examines the relationship between price and sales volume. A Category slicer allows filtering by product category.

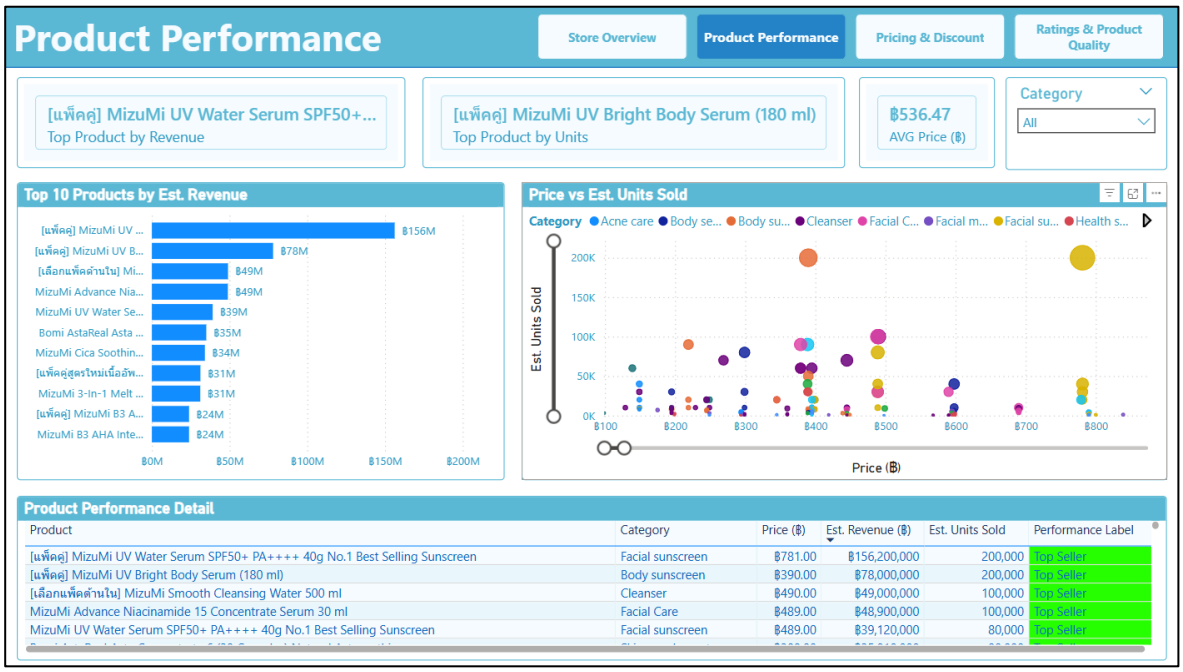

Visual	Type	What it shows
KPI Card 1	Card	Top product by revenue — [แพ็คคู่] MizuMi UV Water Serum SPF50+
KPI Card 2	Card	Top product by units — [แพ็คคู่] MizuMi UV Bright Body Serum 180ml
KPI Card 3	Card	฿536.47 — Average product price across all listings
Top 10 Products by Revenue	Bar Chart	Top 10 products ranked by estimated revenue — UV Water Serum dominates at ฿156M
Price vs Est. Units Sold	Scatter Plot	Price on X-axis, units sold on Y-axis, bubble size = revenue — reveals the ฿300–500 sales sweet spot
Product Performance Detail	Table	All products with category, price, revenue, units and performance label (Top/Mid/Low Seller)
Category Slicer	Slicer	Interactive filter to view performance by specific category

5.5 Page 3 — Pricing & Discount

The Pricing & Discount page evaluates the store's pricing strategy and the relationship between discount levels and sales volume across all 12 categories.

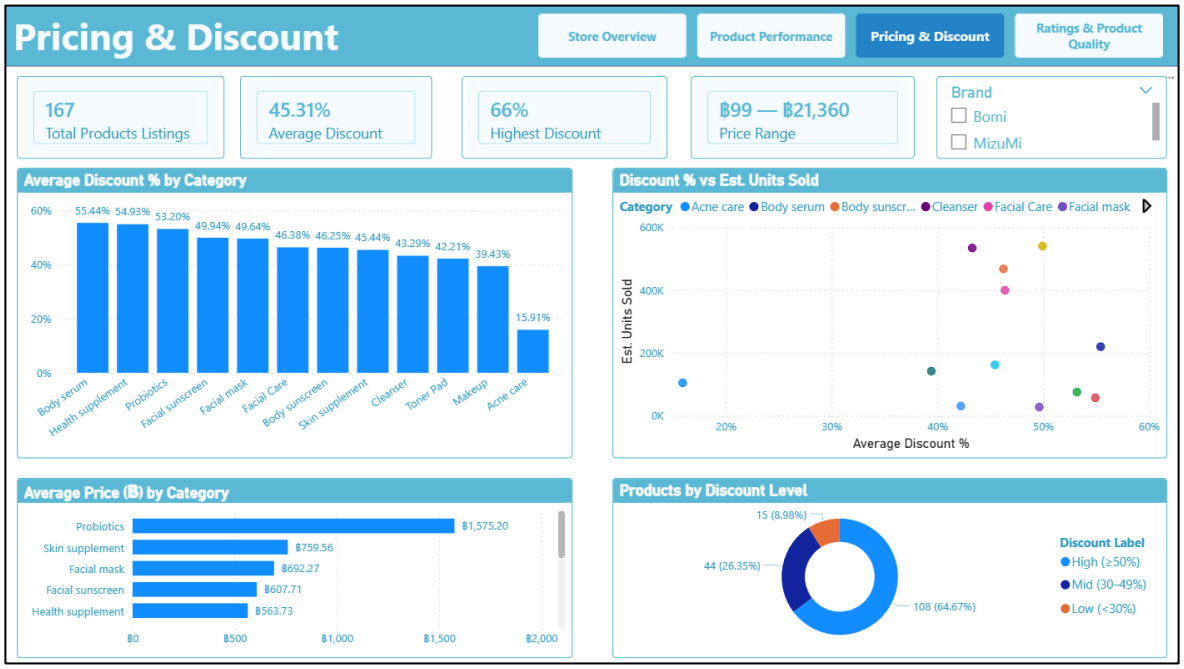

Visual	Type	What it shows
KPI Card 1	Card	167 — Total product listings
KPI Card 2	Card	45.31% — Average discount across the store
KPI Card 3	Card	66% — Highest discount applied to any product
KPI Card 4	Card	฿99 — ฿21,360 — Full price range of the store
Avg Discount % by Category	Bar Chart	Body serum (55.44%) and Health supplement (54.93%) have highest discounts; Acne care (15.91%) is the outlier
Discount % vs Est. Units Sold	Scatter Plot	Average discount on X-axis vs total units on Y-axis per category — shows no clear positive correlation
Avg Price by Category	Bar Chart	Probiotics (฿1,575) is the highest priced category; Makeup (฿217) is the most affordable

Products by Discount Level	Donut Chart	64.67% High (≥50%), 26.35% Mid (30–49%), 8.98% Low (<30%) — majority are deeply discounted

5.6 Page 4 — Ratings & Product Quality

The Ratings & Product Quality page assesses product rating patterns across categories and examines whether higher ratings correlate with stronger sales performance.



Visual	Type	What it shows
KPI Card 1	Card	4.9 — Average store rating across all products
KPI Card 2	Card	28.14% — Percentage of products with a perfect 5.0 rating
KPI Card 3	Card	163 — Number of products with rating ≥ 4.9 (97.6% of all listings)
KPI Card 4	Card	167 — Total listings
Avg Rating by Category	Bar Chart	Facial mask and Facial Care score 5.0; all other categories score 4.9 — X-axis starts at 4.5 to show differences clearly
Rating vs Est. Units Sold	Scatter Plot	Rating on X-axis, units on Y-

		axis, bubble size = revenue — most products cluster at 4.9 with no strong rating-sales correlation
Products by Rating Score	Bar Chart	116 products at 4.9, 47 at 5.0 — distribution confirms near-universal high quality
Top Highest Rated Products	Table	All 47 products with 5.0 rating showing units sold and revenue — wide variance in commercial performance among perfect-rated products

6. Key Insights & Findings

This section presents the key findings derived from the SQL analysis and Power BI dashboard, organised by the five project objectives. All figures are based on estimated sales data scraped from the MizuMi & Bomi Official Shop on Shopee Thailand on 20 March 2026.

6.1 Top-Performing Products by Revenue and Units Sold

The store's revenue is heavily concentrated in a small number of high-performing products. The top product — [แพ็คคู่] MizuMi UV Water Serum SPF50+ PA++++ 40g — generated an estimated ฿156.2 million in revenue with 200,000 units sold, accounting for approximately 12.9% of total store revenue on its own. The top 10 products by revenue collectively account for the majority of total store sales.

Rank	Product	Category	Price (฿)	Est. Revenue (฿)
1	[แพ็คคู่] MizuMi UV Water Serum SPF50+	Facial sunscreen	781	156,200,000
2	[แพ็คคู่] MizuMi UV Bright Body Serum 180ml	Body sunscreen	390	78,000,000
3	MizuMi Smooth Cleansing Water 500ml	Cleanser	490	49,000,000
4	MizuMi Advance Niacinamide 15 Concentrate Serum	Facial Care	489	48,900,000
5	MizuMi UV Water Serum SPF50+ PA++++ 40g No.1	Facial sunscreen	489	39,120,000
6	Bomi AstaReal Asta Concentrate 6 30 Capsules	Skin supplement	389	35,010,000
7	MizuMi Cica Soothing Moisture Gel 45ml	Facial Care	379	34,110,000
8	MizuMi UV Jelly Aqua Fresh SPF50+ PA++++	Facial sunscreen	781	31,240,000

9	MizuMi 3-In-1 Melt Away Cleansing Balm 60ml	Cleanser	445	31,150,000
10	[แพ็คคู่] MizuMi B3 AHA Intense White Body Booster	Body serum	598	23,920,000

- 9 out of 10 top revenue products are MizuMi — Bomi's only entry is Bomi AstaReal at rank 6
- Bundle products ([แพ็คคู่] prefix) dominate the top — 4 of the top 10 are bundle listings, showing that value bundles are a key revenue driver
- The #1 product generates 2x more revenue than the #2 product — indicating a significant concentration risk

6.2 Category-Level Sales Distribution


Facial sunscreen is the store's single most valuable category, generating ฿352.4 million in estimated revenue and 540,783 estimated units sold — accounting for 29% of total store revenue. The top 4 categories (Facial sunscreen, Cleanser, Facial Care, Body sunscreen) collectively generate over ฿892 million — approximately 74% of total store revenue.

Category	Est. Revenue (฿)	Est. Units Sold	% of Total Revenue
Facial sunscreen	352,364,400	540,783	29.1%
Cleanser	199,549,920	534,767	16.5%
Facial Care	184,538,000	400,000	15.2%
Body sunscreen	156,360,000	468,000	12.9%
Skin supplement	86,359,135	162,013	7.1%
Body serum	82,758,000	220,000	6.8%
Probiotics	48,651,402	75,318	4.0%
Makeup	30,202,000	142,000	2.5%
Health supplement	29,375,386	56,968	2.4%
Acne care	18,110,000	105,000	1.5%
Toner Pad	14,181,003	30,819	1.2%
Facial mask	10,045,124	27,556	0.8%

- Bomi supplement categories (Skin supplement, Probiotics, Health supplement) collectively contribute 13.5% of total revenue despite representing 20.4% of total product listings
- Facial mask and Toner Pad are the lowest revenue categories — contributing less than 1% and 1.2% respectively
- The bottom 6 categories combined generate only ฿220.5M — less than the Facial sunscreen category alone

6.3 Price vs Sales Volume Relationship

The scatter plot analysis of price versus estimated units sold reveals that there is no simple linear correlation between price and sales volume for MizuMi & Bomi products. Instead, three distinct patterns emerge across the price spectrum.

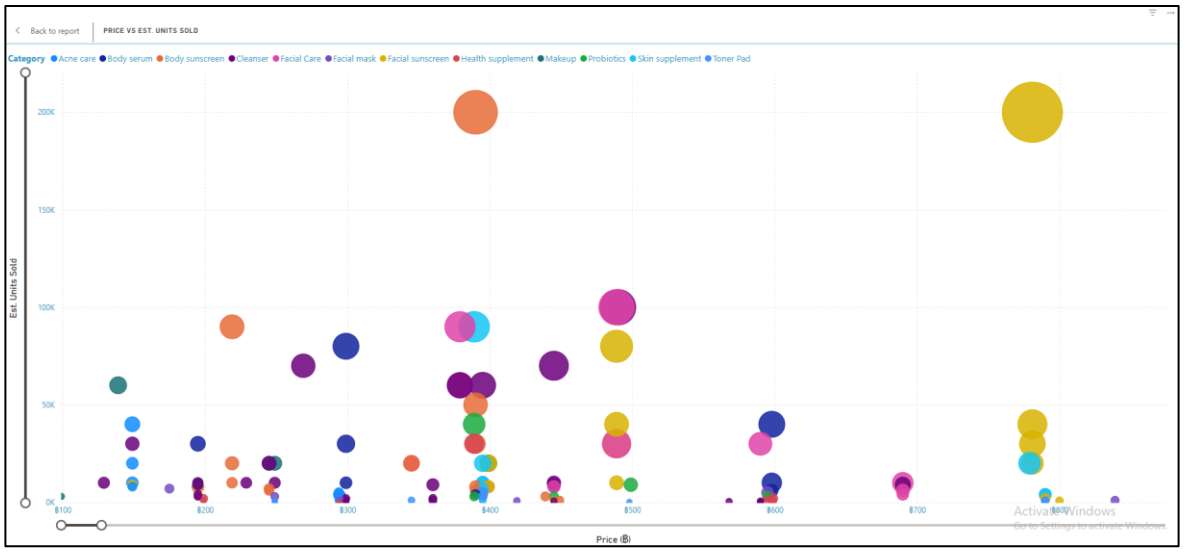


- ฿300–500 price range — the highest concentration of products with strong sales volume. Multiple categories including Cleanser, Facial Care and Body Sunscreen achieve their best unit volumes in this range, suggesting an optimal pricing sweet spot for volume-driven sales
- Premium outliers (฿700–800) — two products achieve 200,000+ units sold despite premium pricing. Both are MizuMi sunscreen bundle packs, demonstrating that strong brand equity and product reputation can overcome price sensitivity in flagship categories
- Low price does not guarantee high sales (฿99–200) — products in this range are mostly accessories and trial sizes which have naturally lower demand, showing that price reduction alone is not a reliable strategy for driving volume

Overall, category type and brand strength are stronger drivers of sales volume than price alone. The dominance of Facial sunscreen across multiple price points confirms this finding.

6.4 Discount Impact on Sales Performance

The store applies an aggressive and broadly uniform discounting strategy — 91% of all product listings carry a discount of at least 30%, with an average discount of 45.31% across the entire store. However, the analysis reveals that higher discounts do not consistently result in higher sales volume.

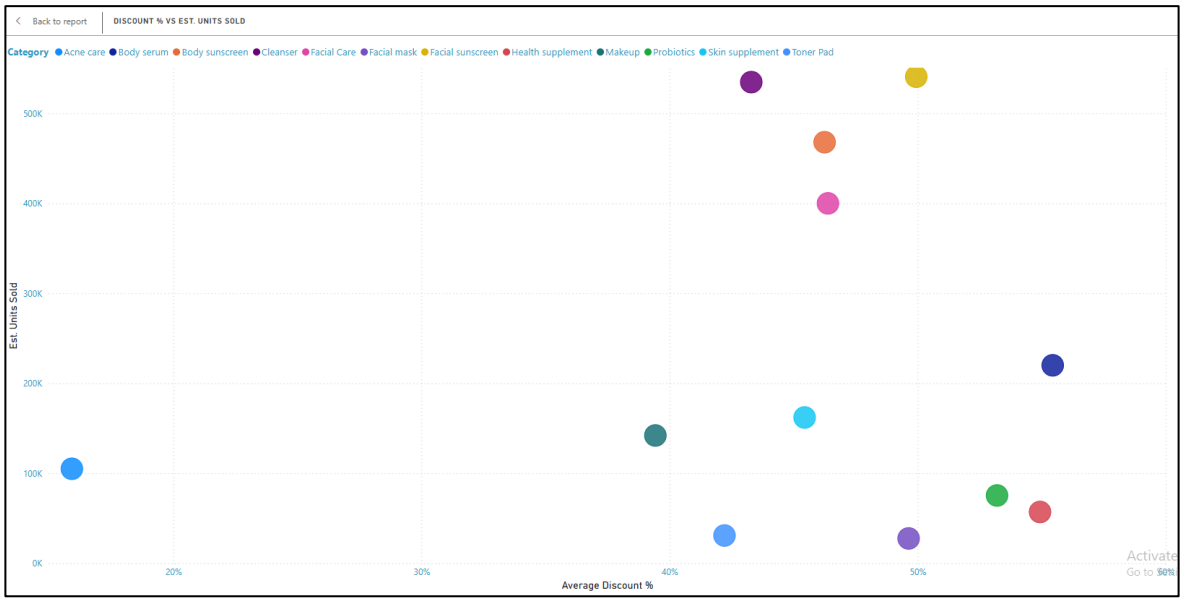

- The two highest-selling categories — Facial sunscreen (541K units, 49.94% avg discount) and Cleanser (535K units, 43.29% avg discount) — achieve their dominance at mid-range discount levels, not the highest
- Body serum (55.44%) and Health supplement (54.93%) apply the highest average discounts in the store yet generate significantly fewer units sold — suggesting discount depth alone cannot compensate for lower category demand
- Acne care is a clear outlier with only 15.91% average discount — the lowest in the store. This is likely influenced by out-of-stock products with no active discount data rather than a deliberate low-discount strategy
- 108 out of 167 listings (64.67%) are classified as High Discount (≥50%) — revealing that deep discounting is the store's default commercial mechanism rather than an exception


The data suggests discounting functions as a baseline expectation on Shopee rather than a differentiating sales lever — customers expect heavy discounts and the store consistently delivers them.

6.5 Product Rating Patterns Across Categories

MizuMi & Bomi maintain exceptionally high product ratings across the entire store. The average store rating is 4.9 out of 5.0, with 163 out of 167 listings (97.6%) achieving a rating of 4.9 or above.

- Facial mask and Facial Care are the highest rated categories, both averaging a perfect 5.0 — indicating outstanding customer satisfaction in these segments

- All 12 categories maintain an average rating between 4.9 and 5.0 when excluding the non-commercial 48-pack bulk listing — demonstrating consistently high product quality across both brands and all product types
- The store's rating floor is 4.7 — the lowest rated product in the entire store still maintains a near-perfect score, confirming that Mizuhada Group upholds strict quality standards
- 47 products (28.14%) achieve a perfect 5.0 rating — however, revenue among 5-star products ranges from ฿24,402 (Bomi Poodz Fiber) to ฿156.2M (MizuMi UV Water Serum), confirming that rating alone does not determine commercial performance

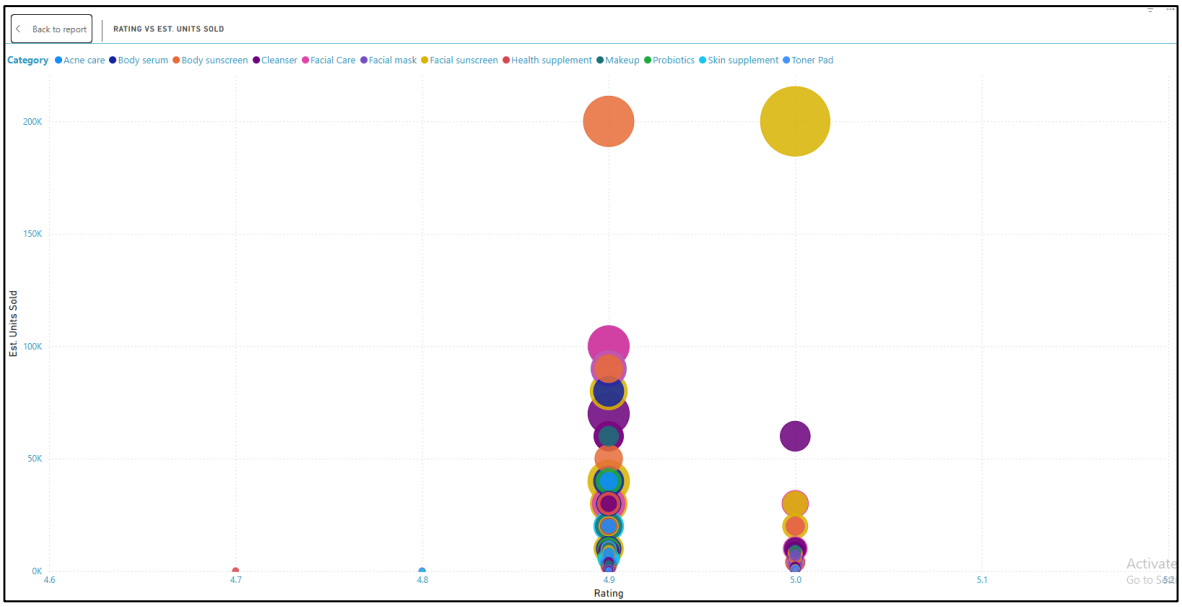

- Within the 4.9–5.0 rating band, no meaningful correlation exists between rating score and units sold — other factors such as category demand, price point, and brand recognition are stronger performance drivers

The consistently high ratings across both MizuMi and Bomi suggest that product quality and customer satisfaction are core strengths of the Mizuhada Group brand, providing a strong foundation for future growth.

7. Recommendations for Mizuhada Group

The following recommendations are derived from the data analysis findings across all five project objectives. Each recommendation is directly supported by evidence from the dataset and is intended to help Mizuhada Group strengthen its Shopee Thailand performance, optimise its product and pricing strategy, and grow the Bomi brand.

Important note: These recommendations are personal analytical observations based solely on historical Shopee sales data scraped on 20 March 2026. They do not account for internal business strategy, production constraints, supplier relationships, marketing budgets, or other factors that Mizuhada Group would have full visibility of. As with any data-driven recommendation, there will be tradeoffs — some suggestions may prove effective while others may not translate directly into real-world results. These are intended as data-informed starting points for discussion rather than definitive strategic directives.

7.1 Expand the Facial Sunscreen Product Line

Finding: Facial sunscreen is the single highest-revenue category at ฿352.4M (29.1% of total store revenue) with 540,783 estimated units sold. The top product alone — [แพ็คคู่] MizuMi UV Water Serum SPF50+ — generates ฿156.2M.

Recommendation:

- Invest in developing new facial sunscreen variants (e.g. new textures, SPF levels, skin concerns) to expand the product range and capture additional customer segments
- Introduce entry-level facial sunscreen products at lower price points (฿150–250) to attract first-time buyers and convert them to higher-value products over time
- Leverage the success of the UV Water Serum to develop a companion product line — for example a UV Water Serum tinted version or UV Water body extension — to cross-sell to existing loyal customers

7.2 Invest in Bundle Strategy Across More Categories

Finding: Bundle products ([แพ็คคู่] prefix) dominate the top 10 revenue list — 4 of the top 10 products are bundles. The #1 and #2 products are both bundles, generating ฿156.2M and ฿78M respectively. Bundle listings consistently achieve higher revenue per transaction.

Recommendation:

- Extend the bundle strategy to underperforming categories — particularly Facial mask (฿10M, 0.8% revenue share) and Toner Pad (฿14M, 1.2%) — by creating value bundle packs that encourage higher basket sizes
- Create cross-category bundles that pair top-selling products together — for example a "Complete UV Routine" bundle combining facial sunscreen + body sunscreen + UV lip product — to increase average order value

- Promote bundles more prominently during Shopee campaign events (Super Brand Day, Flash Sale) where bundle deals perform strongly

7.3 Review Discounting Strategy for Low-Revenue Categories

Finding: The store applies an average discount of 45.31% across all products, with 64.67% of listings carrying a high discount (≥50%). However, the analysis shows no positive correlation between higher discounts and more units sold — categories with the highest discounts (Body serum 55.44%, Health supplement 54.93%) generate significantly fewer units than lower-discounted categories.

Recommendation:

- Reduce discount depth for high-demand categories like Facial sunscreen and Cleanser where brand strength already drives sales — these categories do not need deep discounts to perform well, and reducing discounts would improve profit margins without significantly affecting volume
- Use discount strategically as a promotional tool rather than a permanent pricing mechanism — reserve high discounts (≥50%) for flash sales, new product launches, and campaign events rather than applying them year-round
- For Bomi supplement categories, consider alternatives to deep discounting — such as free gift with purchase, sample sachets, or starter kit bundles — to attract new customers without permanently eroding perceived product value

7.4 Strengthen Bomi's Market Position on Shopee

Finding: Bomi contributes only 13.56% of total store revenue (฿164M) despite representing 20.4% of total product listings (34 products). Only 1 Bomi product (AstaReal Asta Concentrate) appears in the top 10 revenue list. Bomi's supplements are priced significantly higher than MizuMi skincare — Probiotics average ฿1,575 — yet generate far fewer units.

Recommendation:

- Develop Bomi-specific introductory products at lower price points (฿199–299) to reduce the purchase barrier for first-time supplement buyers on Shopee — the supplement category typically requires more education and trial before customers commit to premium-priced products
- Create content-driven product listings for Bomi — detailed ingredient explanations, before/after testimonials, and clinical evidence summaries — to build trust and justify premium pricing in a category where customers require more convincing than skincare
- Bundle Bomi supplements with best-selling MizuMi skincare products to introduce supplement customers from within MizuMi's existing 1.6 million follower base — for example pairing a best-selling UV serum with a skin supplement
- Focus Bomi marketing on the top 3 performing supplement products — AstaReal (฿35M), Zincne X (฿10M+), R-Gluta X — rather than spreading effort across all 34 listings equally

7.5 Prioritise Growth in the ฿300–500 Price Range

Finding: The scatter plot analysis reveals that the ฿300–500 price range is the sweet spot for sales volume — the highest concentration of products with strong units sold sits in this range. Categories that cluster here (Cleanser ฿416 avg, Body sunscreen ฿323 avg, Body serum ฿430 avg) are among the highest-volume categories in the store.

Recommendation:

- When launching new MizuMi skincare products, target the ฿300–500 price range as the primary positioning — this maximises the potential for high volume sales while maintaining reasonable margin
- For existing products priced above ฿500, consider introducing smaller or single-use versions at ฿300–400 to attract volume-sensitive buyers, with the larger size as an upsell
- Use the ฿300–500 price tier as the anchor point for bundle pricing — ensuring bundle deals land in this range to maximise conversion rates

7.6 Leverage High Ratings as a Marketing Asset

Finding: 97.6% of products maintain a rating of 4.9 or above — an exceptional quality benchmark. Facial mask and Facial Care achieve a perfect 5.0 average. The store's rating floor is 4.7 — the lowest-rated product in the store still nearly perfect. This is a significant competitive advantage that is currently underleveraged.

Recommendation:

- Prominently feature store and product ratings in all Shopee marketing materials, product banners, and campaign promotions — "4.9★ Rated Store" and "5.0★ Rated Product" badges build trust with first-time buyers and reduce purchase hesitation
- Use the high ratings of Facial mask (5.0 avg) and Facial Care (5.0 avg) categories to drive awareness of these underperforming revenue categories — high ratings can serve as a credibility signal to attract customers who have not yet tried these products
- Actively collect and showcase written customer reviews for top-rated products — particularly for Bomi supplements where purchase decisions are more considered, testimonials and verified reviews can significantly increase conversion rates
- Maintain the high quality standard across all new product launches — the consistent 4.9+ rating baseline is a brand equity asset that directly supports premium pricing and customer loyalty